



mNN



260.0

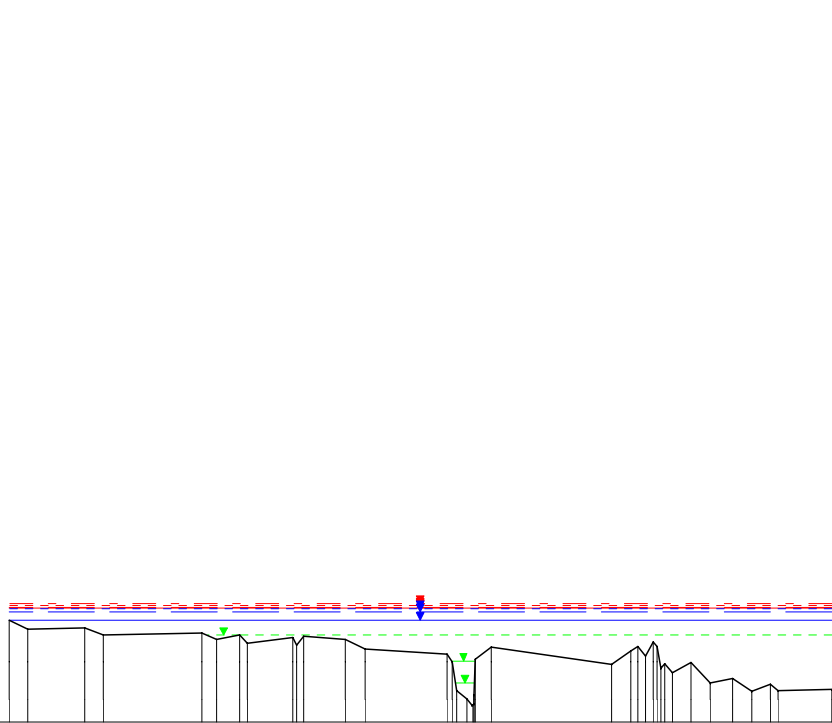

WSP [mNN]	Q [m³/s]
HQExtrem	
263.14	52.64
HQ200	
263.07	41.36
HQ100	
263.04	37.60
HQ50	
263.01	33.88
HQ25	
263.00	32.18
HQ10	
262.92	26.74
HQ5	
262.71	22.53
MHQ	
262.30	16.10
MHQ*05	
261.63	8.05
MHQ*01	
261.05	1.61

Nicht abflusswirksam

Offenes Profil		Y (mNN)	X (m)	DVWK-Bewuchs	Rauheiten Ks (mm)	Teilabschnitte
		262.71	-121.05			Vorland links
		262.46	-116.05			
		262.51	-101.04			Vorland rechts
		262.30	-96.04			
		262.37	-70.03			
		262.30	-60.03			
		262.24	-46.02			
		262.19	-32.02			
		261.94	-27.01			
		261.80	-5.40			
		261.52	38.25			
		261.88	43.26			
		261.59	59.31			
		261.05	64.32			
		261.15	70.34			
		260.82	75.36			
		261.01	80.37			
		260.87	96.41			

Roudbaach, Querprofile

Projekt: TIMIS flood / Dezember 2010

Profil-Nr. 165080
 Modell-km 1.007
 X-Maßstab 1 : 2000
 Y-Maßstab 1 : 200
 Gewässer-km AGE 1.010

