


mNN

262.5
260.0
257.5
255.0
252.5
250.0
247.5
245.0

244.0

| WSP [mNN] | Q [m³/s] |
|-----------|----------|
| HQextrem | |
| 247.62 | 52.96 |
| HQ200 | |
| 247.32 | 41.61 |
| HQ100 | |
| 247.19 | 37.83 |
| HQ50 | |
| 247.14 | 36.33 |
| HQ25 | |
| 246.96 | 30.61 |
| HQ10 | |
| 246.82 | 25.49 |
| HQ5 | |
| 246.72 | 21.22 |
| MHQ | |
| 246.52 | 14.40 |
| 0,5*MHQ | |
| 246.09 | 7.20 |
| 0,1*MHQ | |
| 244.91 | 1.44 |

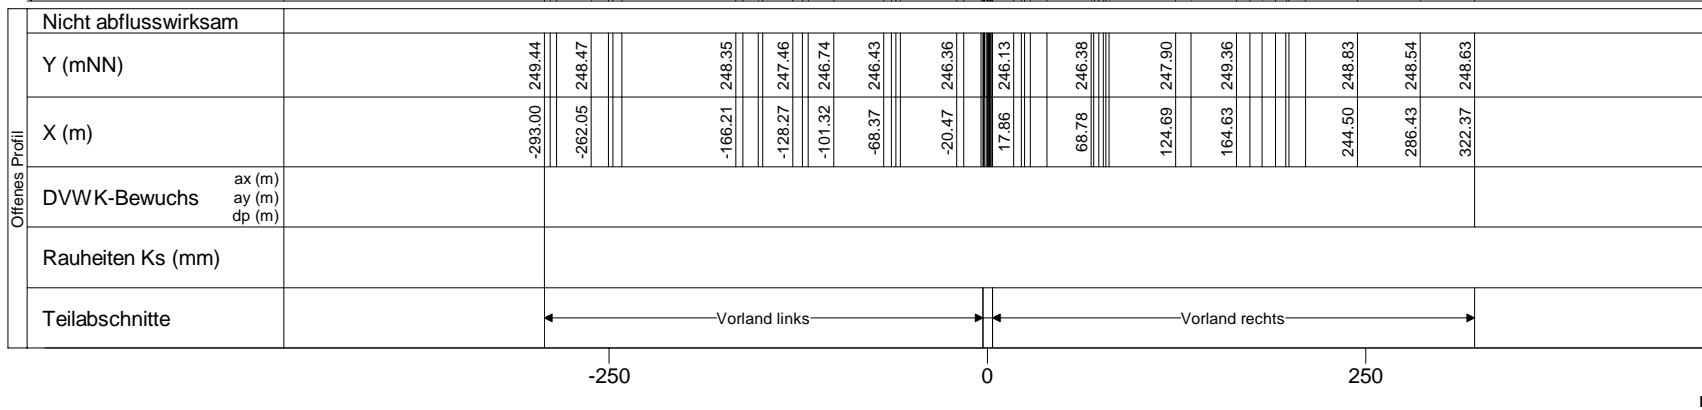

Syre, Querprofile

Projekt: TIMIS flood / Dezember 2010

Profil-Nr. 191580
Modell-km 22.709
X-Maßstab 1 : 5000
Y-Maßstab 1 : 200
Gewässer-km AGE 22.709



Bearbeitet durch
Ernst Basler + Partner
Hydrotec
Ingenieurgesellschaft für Wasser und Umwelt mbH