



mNN



258.0

| WSP [mNN] | Q [m³/s] |
|-----------|----------|
| HQextrem | |
| 260.57 | 23.55 |
| HQ200 | |
| 260.50 | 18.50 |
| HQ100 | |
| 260.47 | 16.82 |
| HQ50 | |
| 260.46 | 16.16 |
| HQ25 | |
| 260.23 | 13.61 |
| HQ10 | |
| 259.98 | 11.33 |
| HQ5 | |
| 259.77 | 9.43 |
| MHQ | |
| 259.35 | 6.40 |
| 0,5*MHQ | |
| 258.94 | 3.20 |
| 0,1*MHQ | |
| 258.49 | 0.64 |

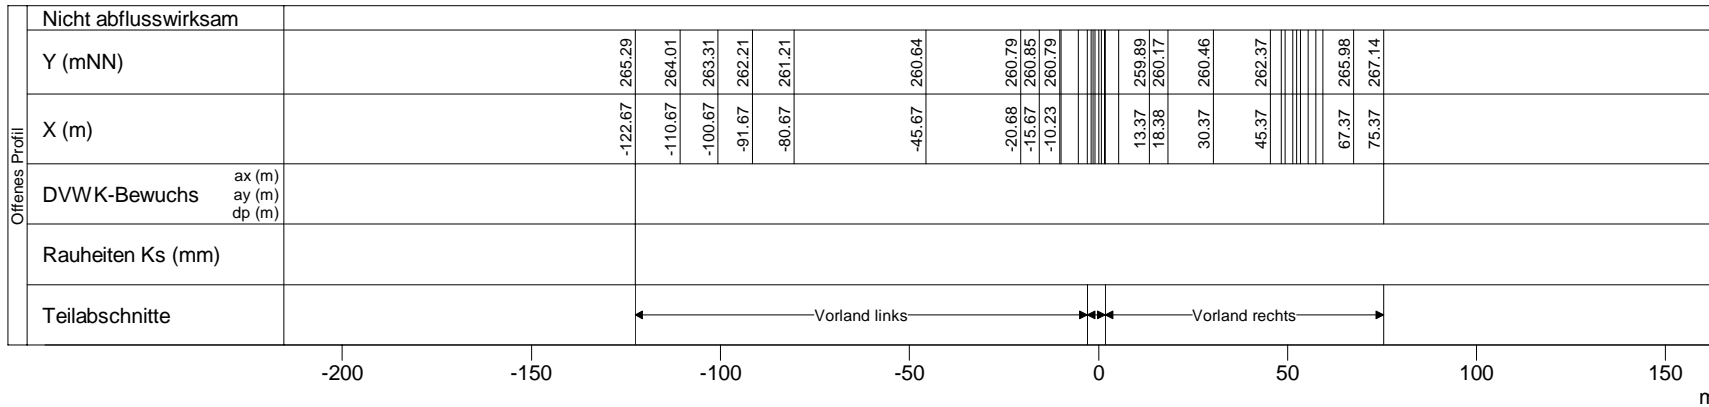

Syre, Querprofile

Projekt: TIMIS flood / Dezember 2010

Profil-Nr. 192010
 Modell-km 30.050
 X-Maßstab 1 : 2000
 Y-Maßstab 1 : 200
 Gewässer-km AGE 30.050



Beauftragt durch
 MINISTÈRE DE L'INTÉRIEUR
 ET À LA GRANDE RÉGION
 Administration de la gestion de l'eau

Bearbeitet durch
Ernst Basler + Partner
 Hydrotec
 Ingenieurgesellschaft für Wasser und Umwelt mbH